



WV Modular DRM Security Integration Guide for Common Encryption (CENC)

Android Supplement

Version 10

© 2013 Google, Inc. All Rights Reserved. No express or implied warranties are provided for herein. All specifications are subject to change and any expected future products, features or functionality will be provided on an if and when available basis. Note that the descriptions of Google's patents and other intellectual property herein are intended to provide illustrative, non-exhaustive examples of some of the areas to which the patents and applications are currently believed to pertain, and is not intended for use in a legal proceeding to interpret or limit the scope or meaning of the patents or their claims, or indicate that a Google patent claim(s) is materially required to perform or implement any of the listed items.

Revision History

Version	Date	Description	Author
1	3/4/2013	Initial revision	Jeff Tinker, Fred Gylys-Colwell, Edwin Wong, Rahul Frias, John Bruce
2	3/14/2013	Added RSA Certificate Provisioning	Jeff Tinker, Fred Gylys-Colwell
4	4/2/2013	Added Generic Modular DRM	Jeff Tinker, Fred Gylys-Colwell
5	4/3/2013	Updated Testing section	Edwin Wong
6	4/5/2013	Refactored common information into <i>Widevine Modular DRM Security Integration Guide for CENC</i> . This document is now the <i>Android Supplement</i> .	Jeff Tinker
7-9		skipped so version number matches main doc.	
10	4/1/2015	Update info about optional features and unit tests	Fred Gylys-Colwell

Table of Contents

[Revision History](#)

[Table of Contents](#)

[Terms and Definitions](#)

[References](#)

[Audience](#)

[Purpose](#)

[Widevine DrmEngine](#)

[Deliverables](#)

[Additional Requirements](#)

[Unit and Integration Testing](#)

Terms and Definitions

Device Id — A null-terminated C-string uniquely identifying the device. 32 character maximum, including NULL termination.

Device Key — 128-bit AES key assigned by Widevine and used to secure entitlements.

Keybox — Widevine structure containing keys and other information used to establish a root of trust on a device. The keybox is either installed during manufacture or in the field. Factory provisioned devices have a higher level of security and may be approved for access to higher quality content.

Provision — Install a Keybox that has been uniquely constructed for a specific device.

Trusted Execution Environment (TEE) — The portion of the device that contains security hardware and prevents access by non secure system resources.

References

Widevine Security Integration Guide for Android-based Devices

Widevine Modular DRM Security Integration Guide for Common Encryption (CENC)

Android DRM API for DASH

DASH - 23009-1 MPD and Segment Formats

DASH - 14496-12 ISO BMFF Amendment

DASH - 23001-7 ISO BMFF Common Encryption

Audience


This document is intended for SOC and OEM device manufacturers to integrate with Widevine content protection on android devices.

Purpose

This document defines steps required to build a Widevine DrmEngine component for an android device, and the required functionality of the OEM-provided OEMCrypto library. It contains Android-specific supplemental information for the common document *Widevine Modular DRM Security Integration Guide for Common Encryption (CENC)*.

Widevine DrmEngine

The Widevine DrmEngine implements the MediaDrm and Crypto APIs to support content decryption in support of the Android [MediaCodec](#) and [MediaCrypto](#) APIs. Refer to the “Android DRM API for DASH” document to learn more about how the DrmEngine interacts with these higher level APIs.

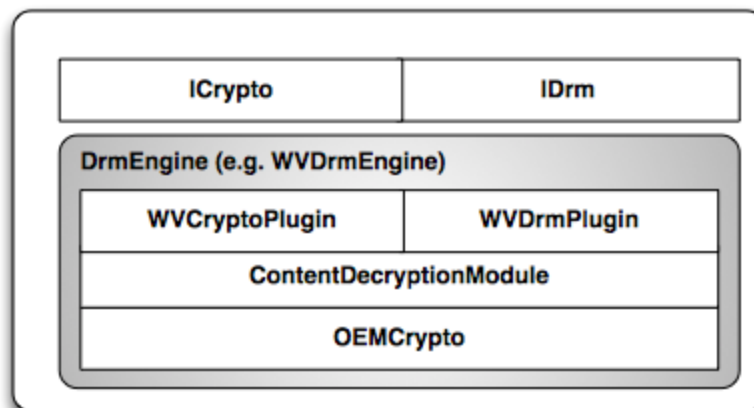

The OEMCrypto API defines a hardware abstraction layer to enable the Widevine DrmEngine functionality to be adapted to the underlying hardware feature set.

The remainder of this document defines the OEMCrypto APIs and steps required to build and test the vendor-supplied OEMCrypto implementation library `liboemcrypto.so` required by the Widevine DrmEngine component on android devices.

Deliverables

The OEMCrypto API implementation should be performed by the vendor. The API is to be implemented in the shared library liboemcrypto.so, which should be placed in /vendor/lib on the device.

Additional Requirements

In the document **Widevine Modular DRM Security Integration Guide for Common Encryption (CENC)**, several features are listed as optional. All android devices must be provisioned with a production keybox. The Session Usage Table is not optional for Android devices. An Android device will not pass GTS testing as a Level 1 device unless it can support the Session Usage Table API.

The only functions described in **Widevine Modular DRM Security Integration Guide for CENC** that are optional are:

- **OEMCrypto_WrapKeybox** - not used by CDM code. OEMs may wish to implement this to facilitate provisioning the device.
- **OEMCrypto_InstallKeybox** - used in unit tests. OEMCrypto_LoadTestKeybox is preferred for unit tests. OEMs may wish to implement this to facilitate provisioning the device -- in particular, at initialization, if IsKeyboxValid() returns false, the widevine code will look for a file called /factory/wv.keys and call OEMCrypto_InstallKeybox with that file.
- **OEMCrypto_LoadRSATestKey** - used in unit tests. OEMCrypto_LoadTestKeybox is preferred.

Unit and Integration Testing

A unit test validates a single piece of functionality, in isolation from the rest of the system. The unit test class typically contains unit tests for all of the methods of a single C++ source file. An integration test combines various components and tests the system as a whole.

A number of unit and integration tests are provided for vendors to verify the basic functions of their implementation. The tests utilize Google C++ Testing Framework, which can be found in the Android tree under external/gtest. It can also be downloaded from [Google C++ Testing Framework](https://github.com/google/googletest).

Unit tests for OEMCrypto are found in the android source tree, in the directory \$ANDROID_BUILD_TOP/vendor/widevine/libwvdrmengine/

Setting Up the Build Environment

Before building any tests, please setup the build environment in the local branch

```
. build/envsetup.sh  
lunch <Your TARGET>
```

The unit tests depend on several libraries, it is best to build the entire tree at least once:

```
make -j 12
```

Reference Implementation

The reference implementation is sample code for all the features for OEMCrypto. You can build this and install it on the device to debug or test code, but it does not have a production keybox, and does not have level 1 security. It should not be included in a production device. Build the reference implementation of oemcrypto.so:

```
cd $ANDROID_BUILD_TOP/vendor/widevine/libwvdrmengine/oemcrypto/mock  
mm  
adb root  
adb remount  
adb push $OUT/system/vendor/lib/liboemcrypto.so /system/vendor/lib
```


Make sure to remove the reference version, and clean your source tree before installing your version of liboemcrypto.so. If the unit tests say you have system ID 0x1019, then you are running with a test keybox, and might have the reference implementation still installed.

Once you are familiar with the how to run the unit tests, you should implement and build your own oemcrypto library. In your own directory, build the shared library liboemcrypto.so. It should use the include file OEMCryptoCENC.h, which is found here:

```
LOCAL_C_INCLUDES := \  
    vendor/widevine/libwvdrmengine/oemcrypto/include
```

Targeted Components

The tests provided verify the following emboldened components:

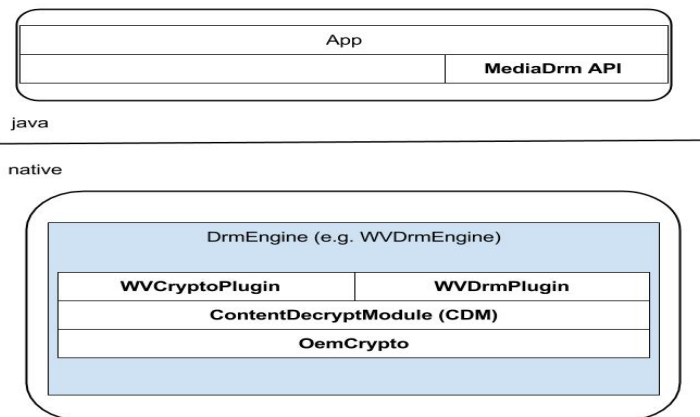

Testing OEMCrypto Library

The reference implementation of OEMCrypto library is in the directory
\$ANDROID_BUILD_TOP/vendor/widevine/libwvdrmengine/oemcrypto/mock

Out of the box, you should be able to compile existing unit tests. First build the gtest library:

```
cd $ANDROID_BUILD_TOP/external/gtest
mm
```

Build the unit tests for oemcrypto.so:

```
cd $ANDROID_BUILD_TOP/vendor/widevine/libwvdrmengine/oemcrypto/test
mm
```

Run the existing unit tests:

```
cd $ANDROID_BUILD_TOP
adb root
adb remount
adb push $OUT/system/bin/oemcrypto_test /system/bin
adb shell /system/bin/oemcrypto_test
```

You should see output that starts with:

```
uses_keybox = true.
loads_certificate = true.
uses_certificate = true.
generic_crypto = true.
api_version = 10.
usage_table = true.
cast_receiver = false.
LOAD_TEST_KEYBOX: Call LoadTestKeybox before deriving keys.
GTest Filter: *-*ForceKeybox*:*CastReceiver*
Note: Google Test filter = *-*ForceKeybox*:*CastReceiver*
```



```
[=====] Running 155 tests from 14 test cases.
[-----] Global test environment set-up.
[-----] 16 tests from OEMCryptoClientTest
[ RUN      ] OEMCryptoClientTest.VersionNumber
            OEMCrypto Security Level is L1
            OEMCrypto API version is 10
            OEMCrypto supports usage tables.
```

... and ends with:

```
[-----] Global test environment tear-down
[=====] 159 tests from 14 test cases ran. (229937 ms total)
[ PASSED  ] 159 tests.
```

Near the top you should see the test NormalGetDeviceId, which should print out your device's device ID. Make sure your security level is correct. There is also a test that prints out the system ID:

```
[-----] 3 tests from OEMCryptoKeyboxTest
[ RUN      ] OEMCryptoKeyboxTest.NormalGetKeyData
            NormalGetKeyData: system_id = 4445 = 0x115D, version=2
```

If you see the system ID 4445 = 0x115D, then your liboemcrypto.so library did not load correctly, and you are running with level 3 fallback.

Starting with version 10 of the API, the unit test program will filter out tests that are not expected to run. For example, if you have not implemented usage tables yet, it will not run most of those tests. Instead, you will see

```
[ FAILED ] OEMCryptoAndroidLMPTTest.SupportsUsageTable
```

Once you have usage tables supported, you will see the rest of those tests running. Near the top of the output is the test filter. Most devices should have a filter of

```
GTest Filter: *-ForceKeybox*:CastReceiver*
```

Cast Receiver or Android TV

Android TV devices should implement functionality to sign with an alternate RSA certificate using the alternate RSA padding schemes. To test this functionality, you should pass the argument "--cast" to the oemcrypto_test program:

```
adb shell /system/bin/oemcrypto_test --cast
```

This tells the unit tests not to filter out the CastReceiver tests.

Forcing the Test Keybox

Before version 10 of the API, the unit tests had to install a test keybox before running. If your device does not implement LoadTestKeybox, then you can force the installation of the test keybox using the command line argument --force_load_test_keybox:

```
adb shell /system/bin/oemcrypto_test --force_load_test_keybox
```

This should **NOT BE DONE ON PRODUCTION DEVICES**. It will install the test keybox on the device and removes the filter preventing the tests from loading keyboxes.

Testing ContentDecryptionModule

Prerequisites: You will need libgtest.a, libgtest_main.a, libgmock.a, libgmock_main.a and liboemcrypto.so to build and run the tests.

Build the Google C++ Testing Framework static libraries(libgtest.a, libgtest_main.a).

```
cd $ANDROID_BUILD_TOP/external/gtest
mm
```

Build the gmock static libraries(libgmock.a, libgmock_main.a).

```
cd $ANDROID_BUILD_TOP/vendor/widevine/libwvdrmengine/test/gmock
mm
```

Build or supply your liboemcrypto.so. The following example builds the mock liboemcrypto.so.

```
cd $ANDROID_BUILD_TOP/vendor/widevine/libwvdrmengine/oemcrypto/mock
mm
```

The full suite of tests can be built and run using the provided script.

```
cd $ANDROID_BUILD_TOP/vendor/widevine/libwvdrmengine
./build_and_run_all_unit_tests.sh
```

Two of the tests are used to verify the CDM functions, they are request_license_test and cdm_engine_test.

The request_license_test uses wvcd::WvContentDecryptionModule interface. The tests include generating and sending a license request to the license server and verifying the response coming back from the server. It also performs query key status and query status tests.

The cdm_engine_test is a unit test that calls the cdm_engine directly to generate a license request and sends it to the license server, then verifies the response coming back from the server.

There are other tests that verify various other cdm code. Please review the script to see a full list of tests.

Testing Java Drm API and Plugins

The plugin tests include tests for the Java Drm API for DASH, WVCryptoPlugin, WVDrmPlugin and WVDrmPluginFactory.

Prerequisites: You will need libgtest.a, libgtest_main.a, libgmock.a and libgmock_main.a to build and run the tests.

Please refer to [Testing ContentDecryptionModule](#) for building the gtest and gmock libraries first.

These are isolated unit tests for the top level components of the DRM engine, they do not exercise the OEMCrypto API.

Build libwvdrmdrmplugin_test from vendor/widevine/libwvdrmengine/mediadrmm/test.

```
cd $ANDROID_BUILD_TOP/vendor/widevine/libwvdrmengine/mediadrmm/test
mm
adb push $OUT/system/bin/libwvdrmdrmplugin_test /system/bin
adb shell /system/bin/libwvdrmdrmplugin_test
```

Build libwvdrmmmediacrypto_test from vendor/widevine/libwvdrmengine/mediacrypto/test.

```
cd $ANDROID_BUILD_TOP/vendor/widevine/libwvdrmengine/mediacrypto/test
mm
adb push $OUT/system/bin/libwvdrmmmediacrypto_test /system/bin
adb shell /system/bin/libwvdrmmmediacrypto_test
```

Build libwvdrmengine_test from vendor/widevine/libwvdrmengine/test/unit.

```
cd $ANDROID_BUILD_TOP/vendor/widevine/libwvdrmengine/test/unit
mm
adb push $OUT/system/bin/libwvdrmengine_test /system/bin
adb shell LD_LIBRARY_PATH=/system/vendor/lib/mediadrmm/
/system/bin/libwvdrmengine_test
```

Build the Java Drm API for DASH test from vendor/widevine/libwvdrmengine/test/java. This is an end-to-end test that uses the MediaDrm APIs to obtain a key request, send it to the Google Play license server and load the response into the CDM, which will cause keys to be loaded into the TEE via the OEMCrypto APIs.

```
cd $ANDROID_BUILD_TOP/vendor/widevine/libwvdrmengine/test/java
mm

adb install MediaDrmAPITest.apk
```

To run this test, find the MediaDrmAPITest icon in the applications on the device and launch it.

Note that there is no UI yet, you will just see a blank screen, but you can check the logcat

output and note that keys are loaded.